

Emerging technologies for ubiquitous monitoring and transmission of physico-chemical variables and their application to biosignal acquisition

Dept. Electronics and Computer Technology— University of Granada (Spain)
PEARL: Pervasive Electronics Advanced Research Laboratory



Porto, 30th June 2022

Speaker

ALMUDENA RIVADENEYRA received the master's engineering. degrees telecommunication environmental sciences, and electronics engineering from the University of Granada, Spain, in 2009, 2009, and 2012, respectively, and the Ph.D. degree in design and development of environmental sensors from the University of Granada in 2014. She has been with the Institute for Nanoelectronics. Technical University of Munich and currently she is Ramon y Cajal Fellow at the University of Granada, where her work is centered in printed and flexible electronics with a special focus on sensors and RFID technology. She obtained the Young Researcher Award in 2019 by the Consejo Social UGR and a Marie Curie Fellowship in 2018.





Who we are





Noel Rodríguez



Diego P. Morales



Encarnación Castillo



Andrés Godoy



Francisco G. Ruíz



Víctor Toral



Carmen L. Moraila Martínez



Alberto Medina-Rull



Yann H. Acid

Alfonso Salinas-Castillo











Sara Rojas



Antonio Rodríguez-Díeguez










Silicon technology

Conventional IC-CMOS technology


- ✓ Miniaturization
- ✓ IC integration
- ✓ Well-established

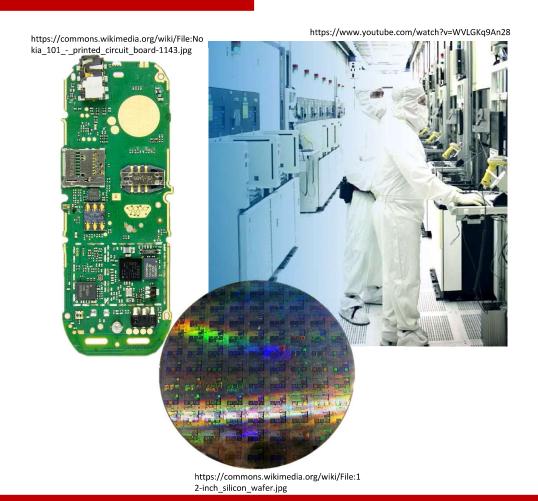

Silicon technology

Conventional IC-CMOS technology


- ✓ Miniaturization
- ✓ IC integration
- ✓ Well-established
- X Technology cost
- **X** Fabrication conditions
- X Sustainability

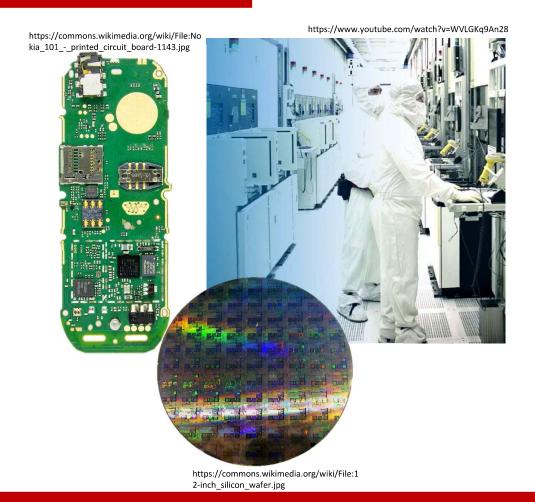



https://doi.org/10.1016/j.snb.2015.01.036






DOI: 10.1126/sciadv.1602076


Printed Electronics

Traditional printing techniques

- ✓ Environmental friendly
- ✓ Large scale: Low-cost and ease of redesign
- ✓ Flexible substrates







Printed Electronics

Traditional printing techniques


- ✓ Environmental friendly
- ✓ Large scale: Low-cost and ease of redesign
- ✓ Flexible substrates
- **X** Size
- X Low performance

Why printed?



Internet of Things (IoT)

Things connected to Things → possible to access data to remotely monitor and control our physical world

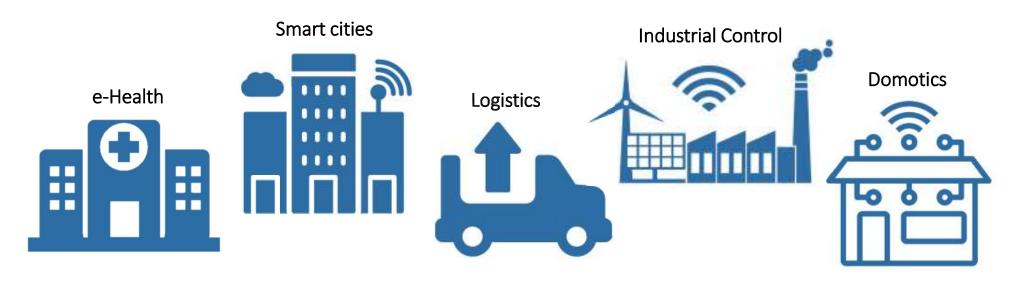

from \$655.8 billion in 2014 to \$1.7 trillion in 2020

Sensors in the IoT

- Wide spectrum of parameters to be covered light, radiation, pressure, acceleration, temperature, gases, humidity, blood pressure, heart rate...
- Rapid increase in the number of sensors: In 2020, 25 Billion connected "Things" will be in use



• Desirable features: Low-cost, environmental friendly, low power consumption

Technological solution

Silicon technology

Conventional IC-CMOS technology

- ✓ Miniaturization
- ✓ IC integration
- ✓ Well-established
- X Technology cost
- x Fabrication conditions
- X Sustainability




Printed Electronics

Traditional printing techniques

- ✓ Environmental friendly
- ✓ Large scale: Low-cost and ease of redesign
- ✓ Flexible substrates
- **X** Size
- X Low performance

Novel Materials

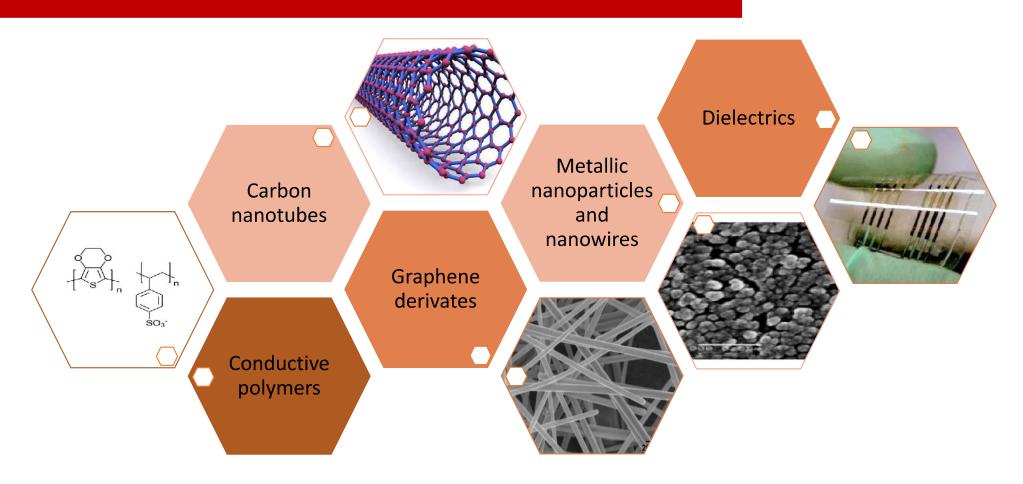

Interdisciplinary Research



Materials




Techniques




Applications

Examples of printed devices






Romero, Francisco J., et al. "Inexpensive and flexible nanographene-based electrodes for ubiquitous electrocardiogram monitoring." *npj Flexible Electronics* 3.1 (2019): 12




Bobinger, Marco R., et al. "Flexible and robust laser-induced graphene heaters photothermally scribed on bare polyimide substrates." *Carbon* 144 (2019): 116-126











Goliya, Yash, et al. "Next Generation Antennas Based on Screen-Printed and Transparent Silver Nanowire Films." *Advanced Optical Materials* (2019): 1900995

Laser-rGO

Romero, Francisco J., et al. "Design, fabrication and characterization of capacitive humidity sensors based on emerging flexible technologies." Sensors and Actuators B: Chemical 287 (2019): 459-467

Rivadeneyra, Almudena, et al. "Cost-Effective PEDOT: PSS Temperature Sensors Inkjetted on a Bendable Substrate by a Consumer Printer." *Polymers* 11.5 (2019): 824.

Application to biosignals

E-health applications

- Embedded systems for wearable and portable applications
- Health: self-monitoring, telemonitoring
- Analysis of physical activity
- Tracking professional activity




iHealth Wristworn Pulse Oximeter, Ambulatory Heart and Blood Pressure Monitor

Application to biosignals

E-health applications:

Two out of five users feel naked when they don't have their wearables on, whilst around a quarter even sleep with them

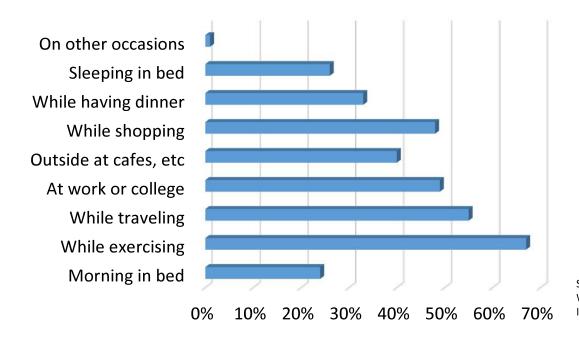


Source: Ericson ConsumerLab, Wearable Technology and The Internet of Things, 2016

Application to biosignals

Some types of biosignals:


- Electrocardiogram, ECG
- Electroencephalogram, EEG
- Electrooculogram, EOG
- Electromyogram, EMG

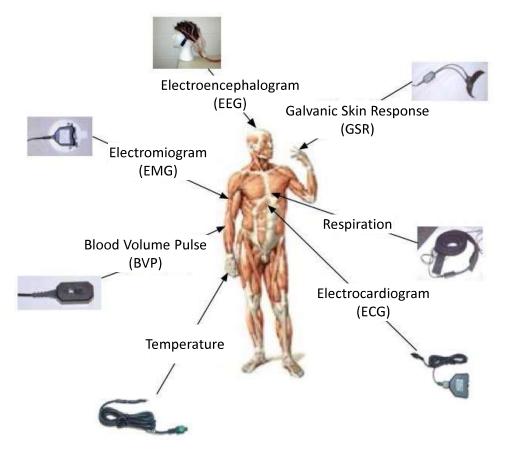

Adapted from "Audiovisual content generation controlled by physiological signals for clinical and artistic applications". In: Proc. of the 3rd summer workshop on Multimodal Interfaces (eNTERFACE 2007)

Electrocardiogram (ECG)

- Most important technique in the diagnosis of cardiovascular diseases
- Generated from electric fields resulting from cardiac muscle activity
- Requires systems with:
 - Analog interface for acquisition and filtering
 - Digital interface for processing and filtering parameter extraction

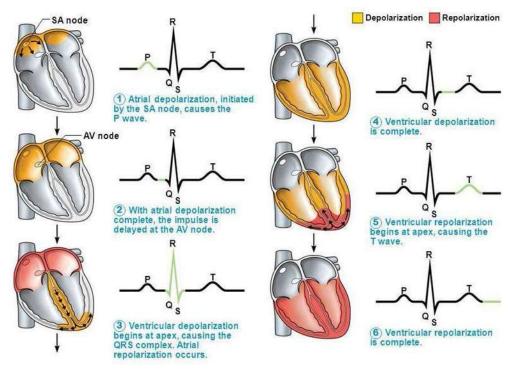


DOI: 10.30991/IJMLNCE.2018v02i03

Electrocardiogram (ECG)

- Most important technique in the diagnosis of cardiovascular diseases
- Generated from electric fields resulting from cardiac muscle activity
- Requires systems with:
 - Analog interface for acquisition and filtering
 - Digital interface for processing and filtering parameter extraction


Typical ECG signal recorded on the skin surface

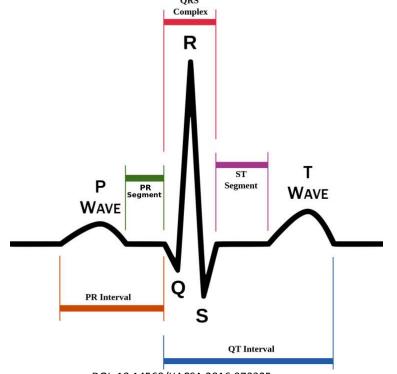

DOI: 10.14569/IJACSA.2016.070325

Acquisition of biosignals with low-cost reconfigurable technologies:


 ECG acquisition with a Field Programmable Analog Array (FPAA) and a Field Programable Gate Array (FPGA)

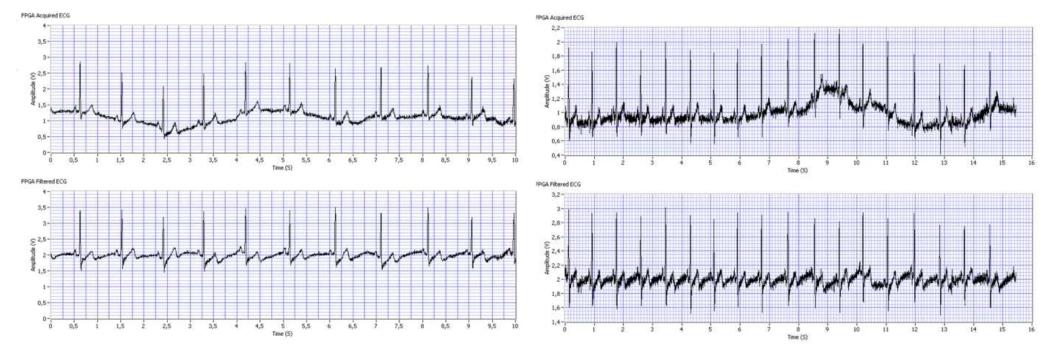


Acquisition of biosignals with low-cost reconfigurable technologies:

Portable instrumentation for real-time fetal ECG signal acquisition (fECG)



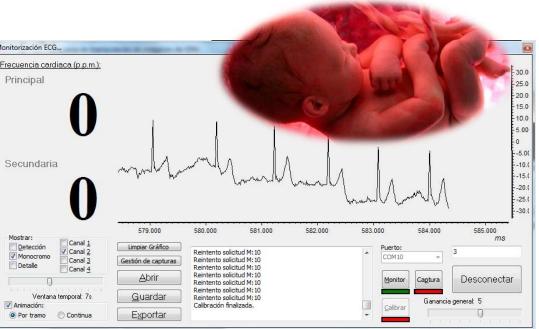


- Prototype instrument for measuring:
 - Blood oxygen saturation
 - ECG
- The device includes data storage and transmission to a mobile phone via Bluetooth

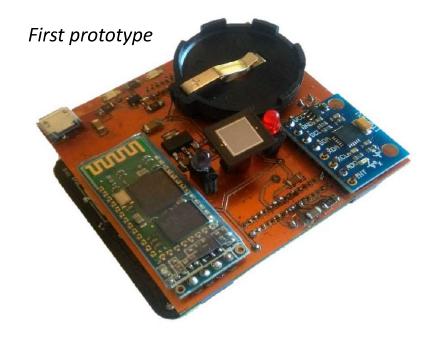

- Prototype instrument for measuring:
 - Blood oxygen saturation
 - ECG
- The device includes measurement storage system and transmission to a smartphone via Bluetooth

Second prototype

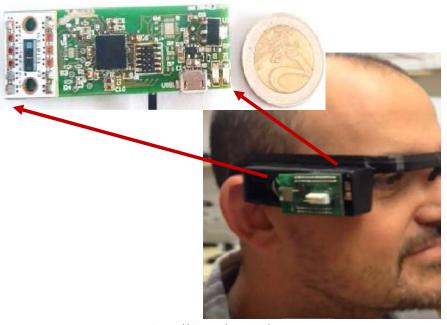



https://doi.org/10.3390/s19071590

App for mobile phone

Android Apps:

- Prototyping and testing
- BLE Connection

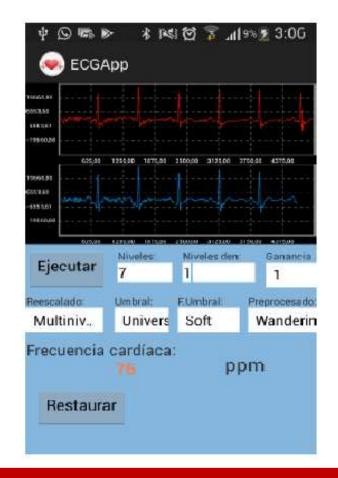

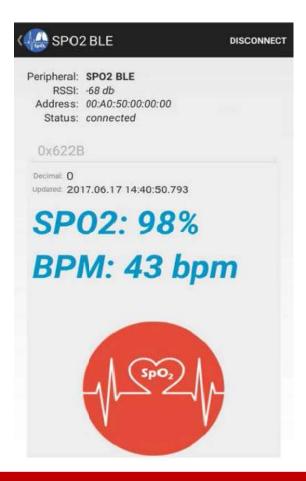

ECG Signal Processing

ECG processing amplitude:

Range: 0.1-5 mV


Pulsations: 0.5-3.5 Hz

BW: 0.01-250 Hz

Artifacts and noise

Interference movement

Wandering

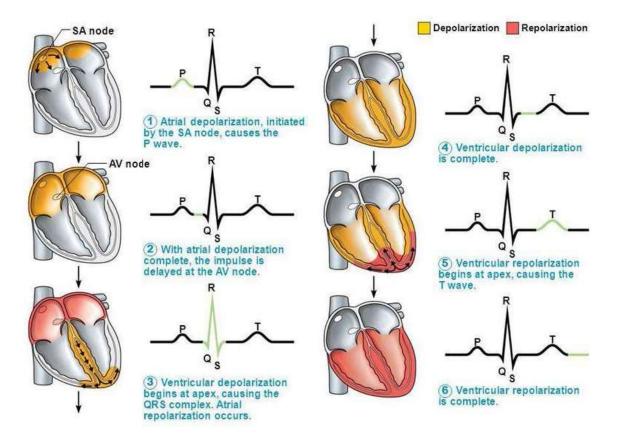

ECG Signal Processing


Development of digital ECG processing algorithms for:

Heart rate detection:

- Threshold based technique
- Technique based on classification by clustering

Noise removal:

 Techniques based on wavelet transform

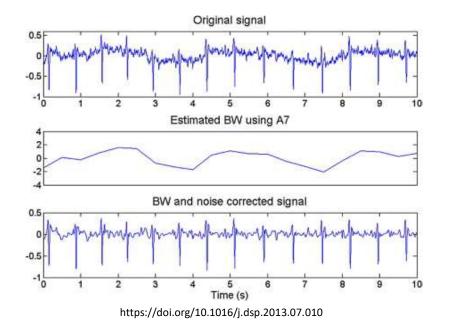


fECG Signal Processing



Non-invasive fetal electrocardiography:

 Maternal ECG (MECG) and Fetal ECG (FECG) components in Abdominal ECG (AECG) signal

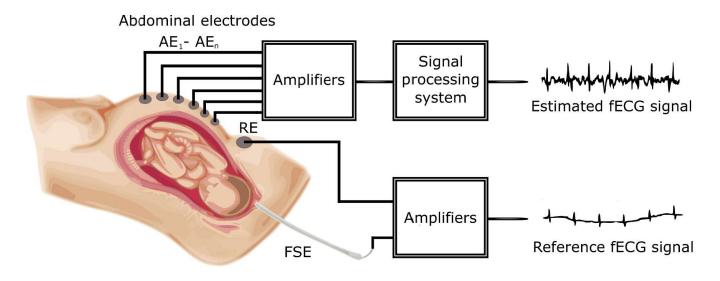


DOI: 10.3389/fphys.2018.00648

fECG Signal Processing



Non-invasive fetal electrocardiography:

Processing techniques similar to ECG:

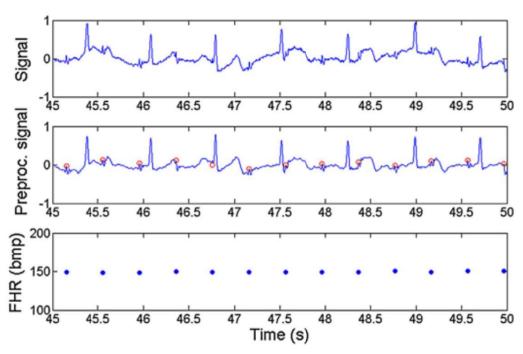

based techniques

• Detection of the fetal ORS

Noise removal using wavelet-


 Detection of the fetal QRS complex using clusteringbased techniques

https://doi.org/10.1371/journal.pone.0199308

fECG Signal Processing



- Clustering-based technique for detection of fetal QRS complexes:
 - Capable of detecting in very noisy environments and/or in the presence of artefacts

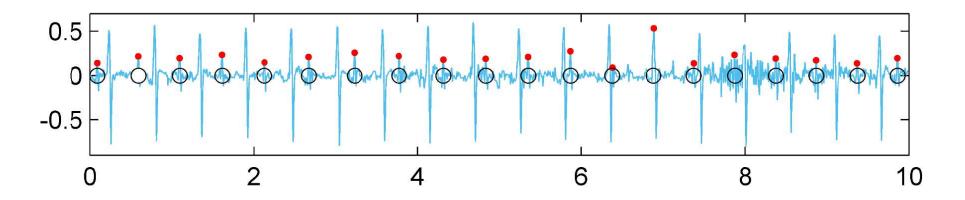

https://doi.org/10.1371/journal.pone.0199308


Practical example

Skin electrodes fabrication based on laser induced graphene on polyimide

Practical example

- Skin electrodes fabrication based on laser induced graphene (LIG) on polyimide
- After LIG, silver (Ag) paste is deposited on the edge of the electrode to enhance conductivity
- The electrodes are cutted and with adhesive film attached to the skin

Fabricated electrodes

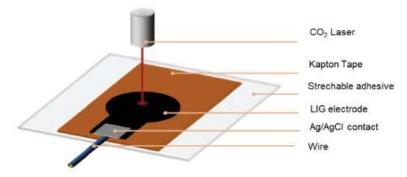

https://doi.org/10.1038/s41528-019-0056-2

Practical example

• Skin LIG electrodes employed for ECG acquisition using Biosignalsplux

Future works

 Ubiquitous real-time fECG and mECG monitoring with a flexible and printed device with remote data access by wireless transmission



Pregnancy belt (Source: Carriwell)



Emerging technologies for ubiquitous monitoring and transmission of physico-chemical variables and their application to biosignal acquisition

Thank you



Porto, 30th June 2022

This work was partially funded by the Andalusian regional projects supported through FEDER funds: B-RNM-680-UGR20, P20_00265, P20_00633; the Spanish Ministry of Sciences and Innovation through the National Project PID2020-117344RB-I00 and the Ramón y Cajal fellow RYC2019-027457-I.